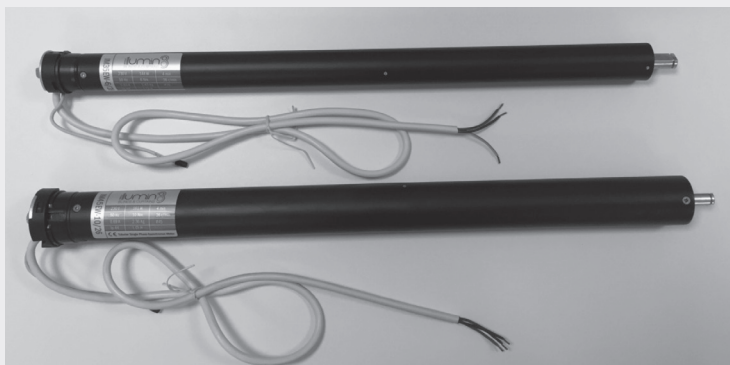



Blindtex Motors

Both 230v with built in radio receiver (RT)




IM35EW-6/28 suits 44mm tube. Torque (6nm) speed 28rpm. Min/max width 650/3000mm
IM45EW/10/26 to suits 58mm tube. Torque (10nm) speed 26rpm. Min/max width 690/4000mm

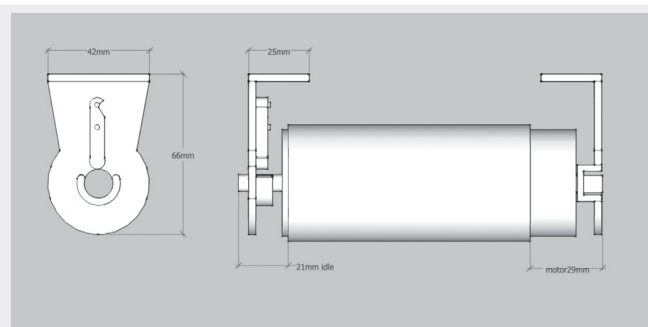IM45EW spacing and bracket size




IM58EW spacing and bracket size

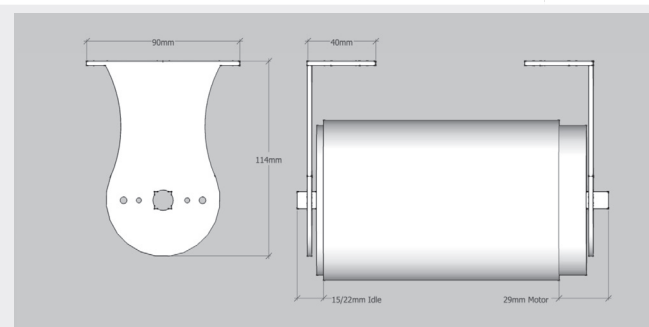


Intermediate bracket with or with out coupling



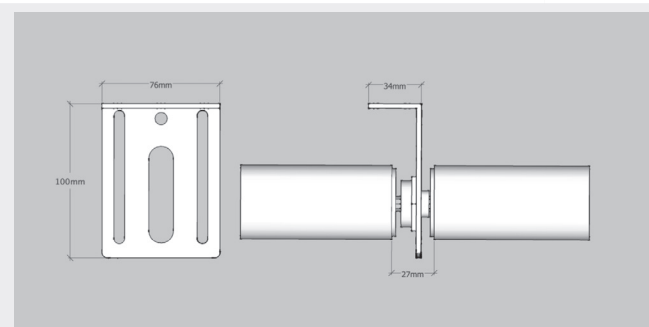Intermediate bracket spacing








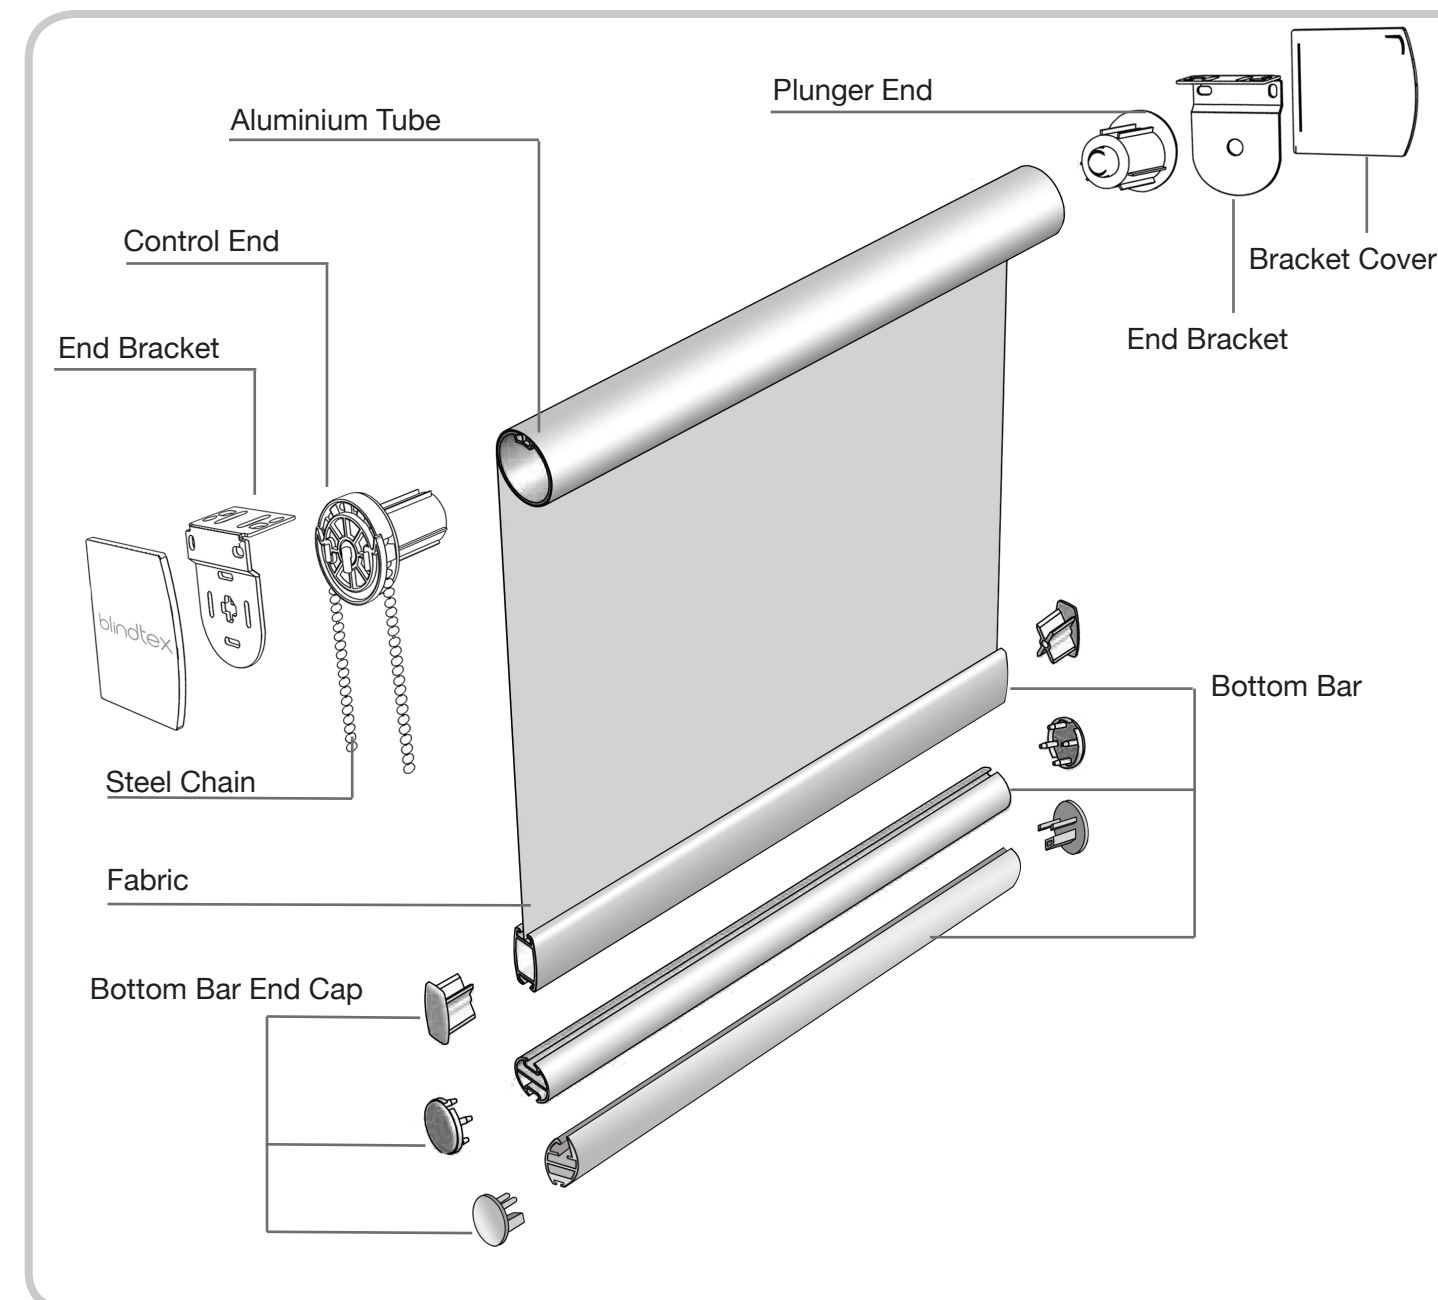
Email: sales@illumin8blinds.com
Tel: +9716 557 8051
Fax: +9716 557 8052
Web: www.blindtex.com








Roller Blinds Technical Specifications





Roller System Components

Tube	
 <p>Side View</p> <p>End View</p>	<p>The design allows for full integration of the selected fabric and also provides maximum resistance to tube deflection.</p>
Brackets (metal)	
	<p>White painted steel. The mounting brackets are designed to allow top, face or side fix installations. The bracket design enables quick and simple installation whilst minimising the light gap between the blind and any recess. Extension brackets are available if required. Brackets are colour keyed to operating system colour. Covers for the mounting brackets are available to suit each size.</p>
Control End / Plunger End	
	<p>Side action control unit & plunger in engineered plastic. Unit locks into brackets. Clutch type suitable up to 9kg weight. Can be left or right control.</p>
Chain	
	<p>Steel bubble chain, nickel plated 6mm pitch, 4.5mm diameter with connector</p>
Bottom Bar	
	<p>Extruded PVC bottom bar in UPVC with 4 locking channels for fabrics & trims. 30mm x 16mm. Weight per linear meter - 200gm</p> <p>Aluminium anodized bottom bar profile with color matched end caps. 29 x 19mm with fabric locking slot. Weight per linear meter - 460gm</p>
Bottom Bar End Caps	
	<p>Co-ordinating end caps apply the appropriate finish to the bottom rail assembly.</p>

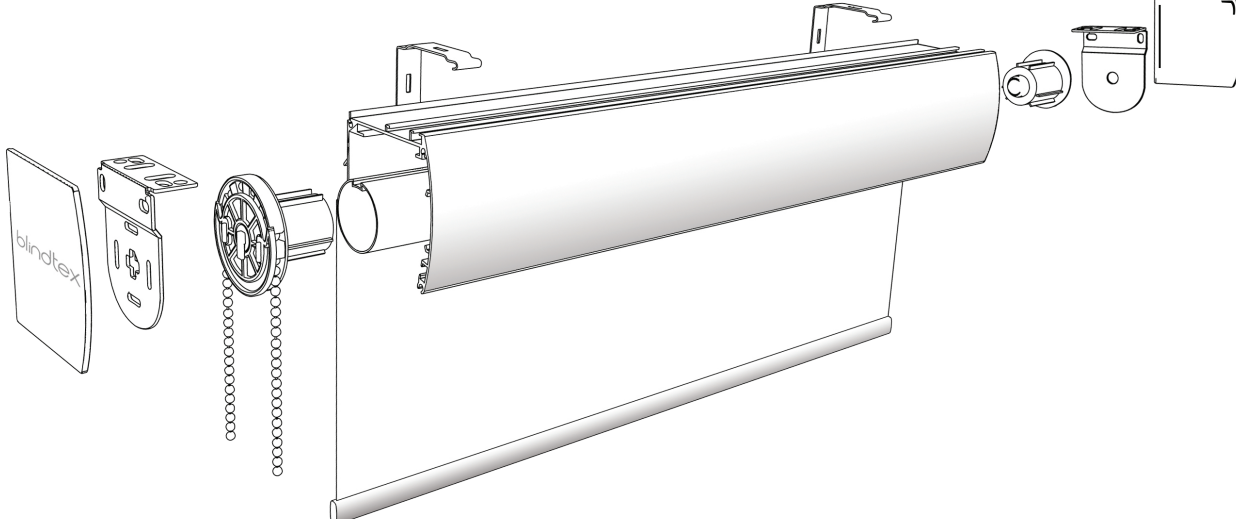Cassette System

	
Cassette System	
	<p>Cassette system, allows quick and easy mounting in either top fix or face position. Our patented design allows for reverse rolling and covering with matching or contrasting fabric.</p>
Mounting Brackets	
	<p>Stove enamelled finish to galvanized steel. The mounting brackets are designed to allow top, face or side fix installations. The bracket design enables quick and simple installation whilst minimizing the light gap between the blind and any recess.</p>
Chain Child Safety	
	<p>Available in nickel plated brass or plastic. The pitch of the operating chain is designed to provide a smooth operation. Available in a variety of colours, each chain system has a variety of connector units to allow for child safe operation where required..</p>
Plastic End Cap	
	<p>Description</p>

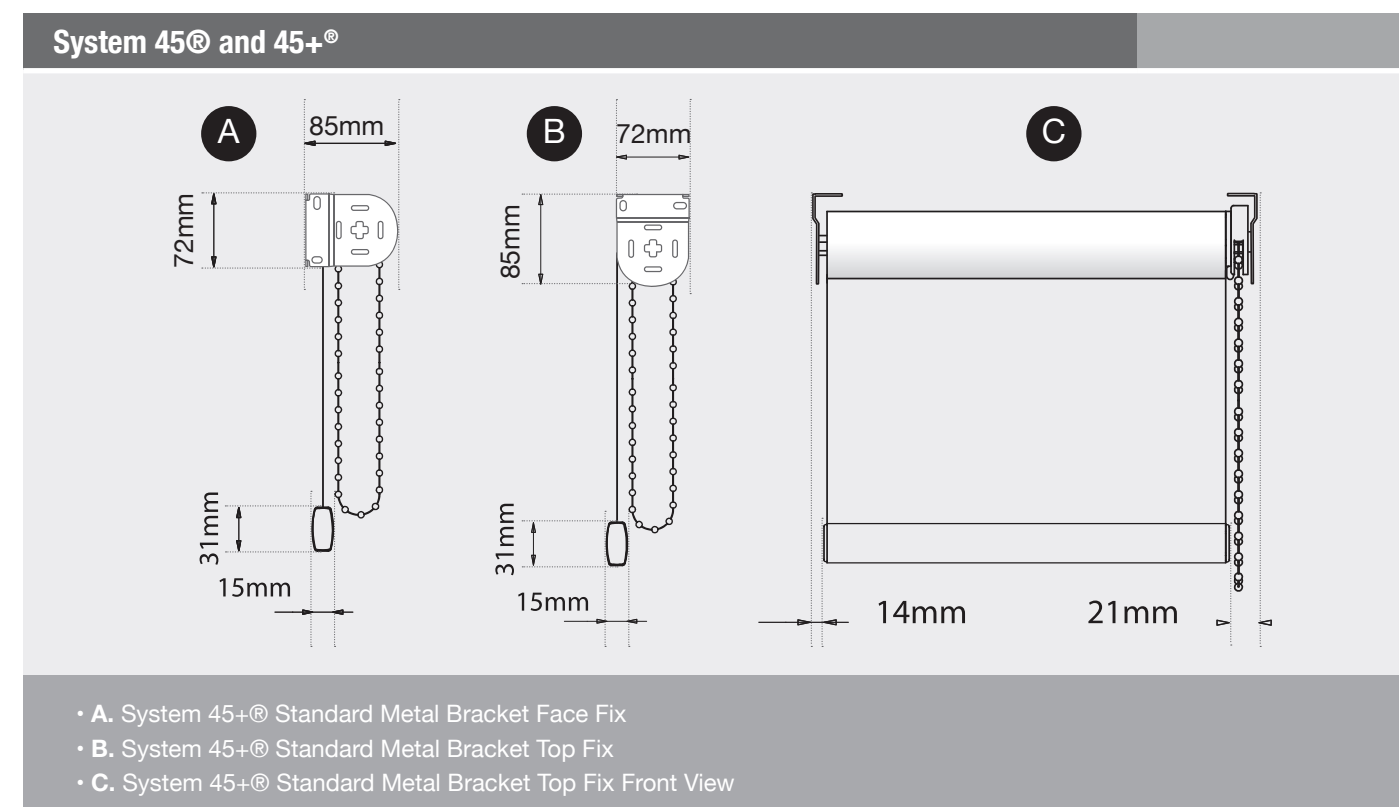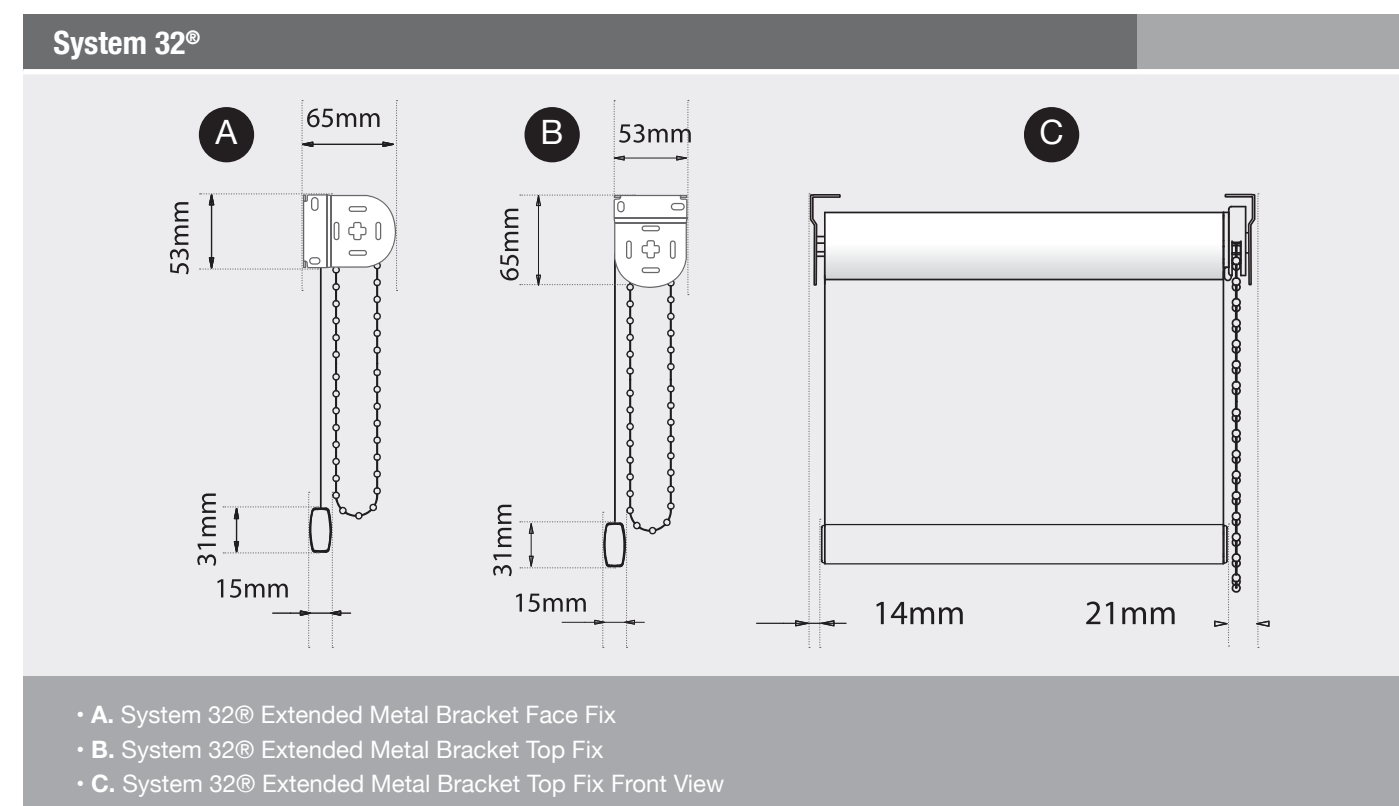Bracket Dimensions



Cassette System

